




GS

AN EXTREMELY DURABLE, WATER-TIGHT, INDUSTRIAL LUMINAIRE

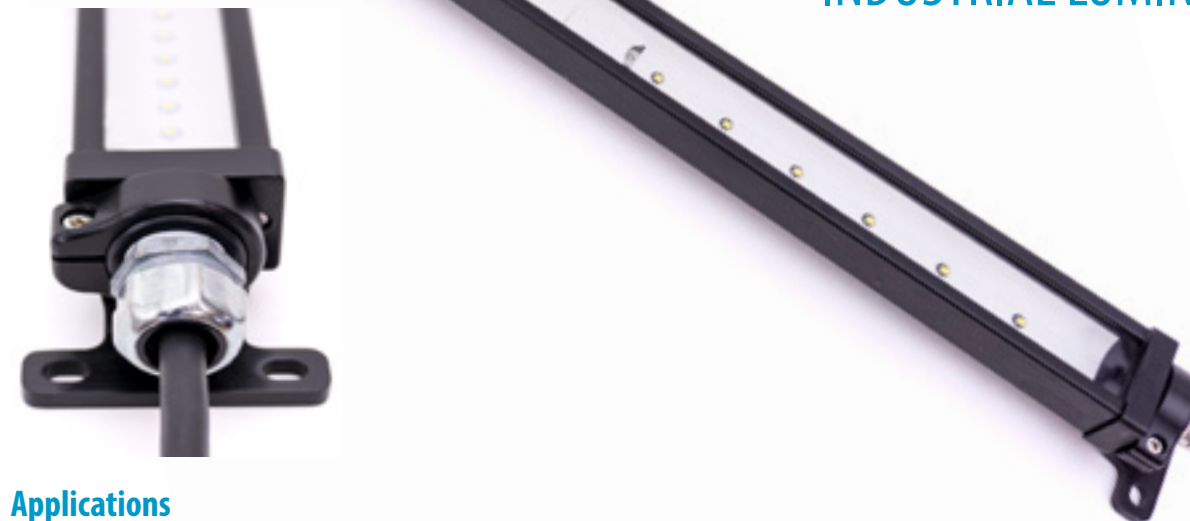

Applications

- Vehicle/equipment cabins
- Indoor building lighting
- Emergency lighting
- Solar/remote lighting
- Tunnel lighting
- Outdoor, harsh/rough usage environments

Features

- Extremely robust
- Thermally managed for longevity
- Easy field angle adjustment
- -40 to +65°C (AC) | -40 to +60°C (DC) operating range
- Sealed to IP66/67

Output


- 559 to 2289 lumens
- 5000K standard
(Additional colours & temperatures available)

Certifications

- Certified to UL 844, UL 1598, UL 2108, UL 8750
- CSA 22.2 No. 137, CSA 22.2 No. 250.0, CSA 22.2 No. 250.13
- Class I, Division 2, Groups ABCD
- Class II Division 2, Groups FG
- Class III
- Class I, Zone 2, Group IIC
- Zone 22

Warranty

- Five (5) year limited warranty



Extremely durable and water-tight, the GS Series of fixtures are able to withstand the most demanding environments. The GS was designed as a hazardous location, light weight linear strip luminaire with a projected lifespan of 100,000 hours. Multiple lengths, optics and mounts make the GS a long term solution to area lighting in mining applications.

The GS is available in a general purpose or Class 1 Div. 2 for hazardous locations. With AC and DC options, the GS can easily be wired into existing facilities or used in remote solar lighting applications.

Using industry leading manufacturing practices, our engineers and industrial designers created a fixture that transfers heat away from the LEDs to the enclosure via the metal core PCB. This optimizes the operating temperature, maximizes efficiency, and increases the longevity of the components.

The GS comes with a field adjustable end bracket or may be flush mounted to surfaces or ceilings using carriage bolts. With wide or narrow beam profiles, multiple lengths and colour options, the GS provides a long term solution for linear strip lighting applications.



915 9th Avenue SE
Calgary, AB, Canada

T2G 0S5

P: 403.242.7475

F: 403.243.6190

info@nemalux.com

www.nemalux.com

Product Features

MOUNTING

Fixture has two mount options:

- End brackets that allow for easy field adjustable 360° rotation
- Carriage bolts for mounting to surfaces

POWER SUPPLIES

- Utilizes high performance LED drivers for better efficiency and up to 100,000 hours of maintenance-free operation
- 12V or 24V DC input options can run directly off of vehicle or facility low voltage DC

REFLECTOR

- High efficiency internal reflector maximizes output

ELECTRONICS ENCLOSURE

- Direct transfer of heat from PCB to the casing to maximize lifetime and reliability
- Suitable for wet location
- Unique case design utilizes compression for sealing and eliminates fasteners on the front face

HOUSING

- Extruded aluminum and copper free aluminum casting
- MIL-SPEC Hard Anodizing (Body) and super-durable powdercoat (End Caps) suitable for rugged outdoor environments
- Custom brackets available upon request
- Polycarbonate lens that is designed to withstand severe impacts

CREE LEDs

- Proven reliability
- High efficiency
- Superior CRI
- Available in standard 5,000K and 3,500K with custom colour and dual colour options available for special order

LIGHT ENGINE

- Metal Core PCB (MCPCB)
- Modular Optics
- Linear drive circuits used in DC versions produce no flicker or high frequency electronic noise
- AC units produce light at 120Hz with no visible flicker and no high frequency switching noise

THERMAL MANAGEMENT

- Heat-sink designed for optimal heat dissipation



To inquire about products, discuss your needs or get a no-obligation lighting layout from our experts, please contact us.

1-877-636-2589


MODEL NUMBER SELECTOR

Example: GS-1-CW-W-BLK-C1D2-12VDC-A


Model	Colour	Optic	Finish	Location	Power	Mount
GS-1	C - Cool White	W - Wide 100°	BLK - Black	GN - General Location	12VDC - 11-16VDC	A - Adjustable
GS-2	W - Warm White ¹	N - Narrow 30° ²	Custom finishes available. Please contact for details. ¹	C1D2 - Hazardous Location	24VDC - 21-28VDC	B - Carriage Bolt
GS-3	Additional options available. Please refer to spec sheet. ¹				120 - 120VAC	
GS-4						

1. Minimum order quantities, additional costs and lead times may incur.
2. Only available on DC version.

OPTIC OPTIONS



W - Wide 100°




N - Narrow 30° (DC Only)

Model	Lumens
GS-1	586
GS-2	1172
GS-3	1758
GS-4	2289

Model	Lumens
GS-1	559
GS-2	1118
GS-3	1677
GS-4	2236


COLOUR TEMPERATURE

Available standard in 5,000K, with additional colour temperatures available from 2,700 to 6,500K.

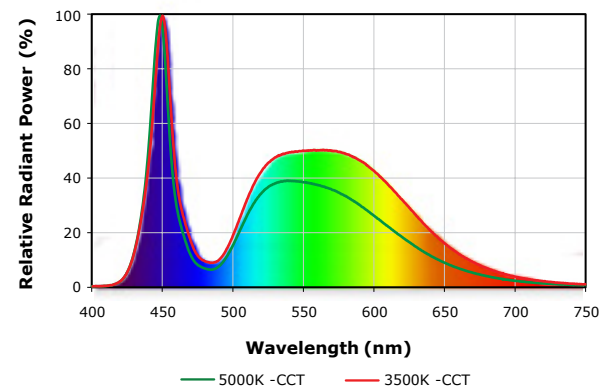


MOUNTING OPTIONS


GS-1: 0.8 kg | 1.8 lbs

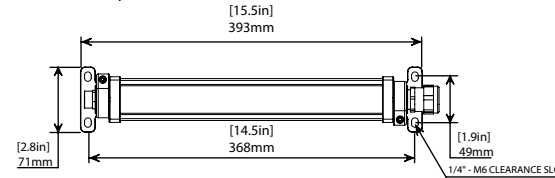


GS-2: 1.2 kg | 2.6 lbs

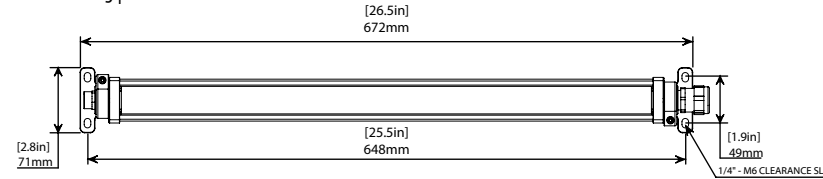

GS-3: 1.8 kg | 3.9 lbs

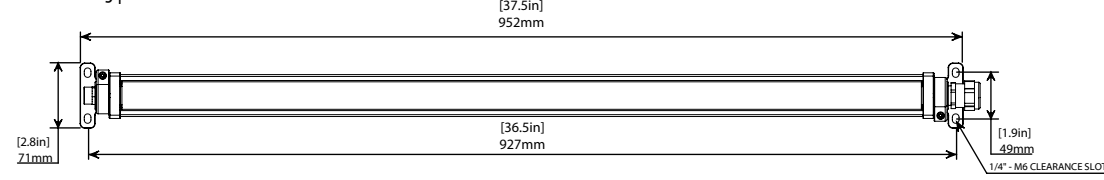

GS-3: 2.4 kg | 5.3 lbs

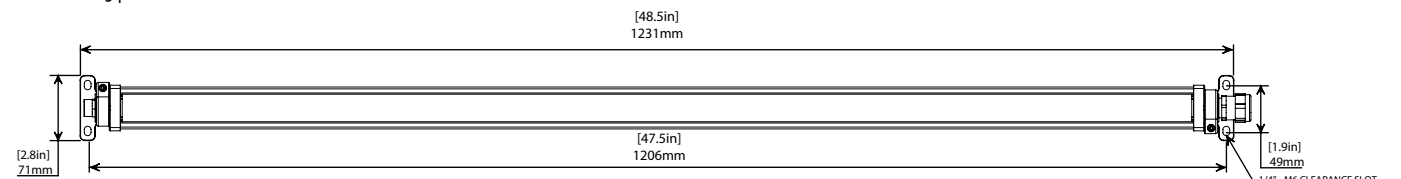


A - ADJUSTABLE MOUNTING BRACKET



B - CARRIAGE BOLT/SURFACE MOUNT



DIMENSIONS (TYP)

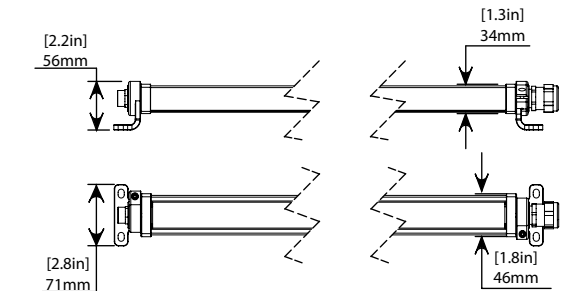

CUSTOM OPTIONS

WIRING

Other wire lengths available in 30cm (1 ft) increments (General location only)

