

KEY FEATURES


- Designed for hazardous location use
- Optimized thermal management of electronics for longevity
- Multiple optical distribution patterns for superior lighting quality
- Approved for through-wiring of several units on a single circuit
- Built-in junction area for simplified termination
- 8 mounting options for installation flexibility
- Available in 90+ CRI



TECHNICAL SPECIFICATIONS / MAXIMUM RATINGS

HOUSING	Copper free aluminum and polycarbonate lens
MOUNTING	See pages 4 and 5 for MOUNTING OPTIONS
INPUT VOLTAGE	AC: 120-277VAC HV: 347-480VAC (50/60Hz)
POWER (TYP)	See CHART on page 2
CURRENT (TYP)	See CHART on page 2
CONNECTIONS	2x 3/4" NPT
DIMMING	0-10V Dimmable, Class 1 wiring See CHART on page 2
TEMPERATURE RANGE	See CHART on page 3
CERTIFICATIONS	Certified to UL 844 / CSA C22.2 No. 137-M1981; UL 1598 / CSA C22.2 No. 250.0-08 ; UL 1598A; UL 8750; CSA C22.2 No. 250.13 Class I, Division 2, Groups ABCD; T4 Class II, Division 2, Groups FG, T4A; Class III; Class I, Zone 2, Groups IIC; Zone 22, Groups IIIB
INGRESS PROTECTION	IP66/67 Suitable for wet locations. Marine outside type (salt water).
COLOR TEMP RANGE	50: 5,000K Special Order: 2,700-6,500K
CRI VALUE (MIN)	50: 70 Special Order: 90+
TOTAL LUMENS	See CHART on page 2
LUMEN MAINTENANCE	LM-80 > 100,000 hrs (Based on CREE long term testing)
WEIGHT	16.4 kg 36 lbs

DIMENSIONS

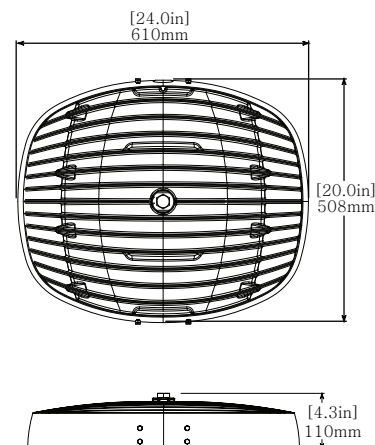

WARRANTY

Five (5) year limited warranty to the original purchaser. The warranty covers defects in materials and workmanship under normal use and service.

For additional information see:
<https://nemalux.com/legal>

*The ambient temperature during lifetime, lumen and chromaticity determination is 25°C ± 1°C.

ELECTRICAL RATINGS


AC MODELS
(5000K CCT, minimum 70CRI)
120-277 VAC Input Range
50/60 Hz Frequency

MODEL	RATED WATTAGE [Watts]	TYPICAL POWER - FLOOD MODELS [WATTS]		TYPICAL POWER - OPTIC MODELS [WATTS]	
		@120VAC	@277VAC	@120VAC	@277VAC
AR10	107	88.8	91.8	96.9	99.2
AR15	145	119.5	121.6	130.0	131.7
AR20	190	156.3	157.0	170.0	170.6
AR25	247	209.7	208.1	224.9	222.7
AR30	312	277.7	274.4	297.0	292.9

HV MODELS
(5000K CCT, minimum 70CRI)
347-480 VAC Input Range
50/60 Hz Frequency


MODEL	RATED WATTAGE [Watts]	TYPICAL POWER - FLOOD MODELS [WATTS]		TYPICAL POWER - OPTIC MODELS [WATTS]	
		@ 347VAC	@ 480VAC	@ 347VAC	@ 480VAC
AR10	129	113.0	118.3	121.9	127.0
AR15	145	135.6	140.6	145.7	150.6
AR20	187	171.5	193.8	180.5	183.3
AR25	248	224.6	228.4	238.3	241.9
AR30	310	287.3	289.5	297.6	297.4

OPTIC OPTIONS



WC - Wide Beam (No Optics)

MODEL	LUMENS	LUMENS/WATT
AR10	12,270	140
AR15	16,490	140
AR20	20,730	134
AR25	26,610	129
AR30	33,190	121



T2 - IESNA Type 2


MODEL	LUMENS	LUMENS/WATT
AR10	12,370	132
AR15	16,340	130
AR20	20,560	125
AR25	26,090	117
AR30	31,670	109

*Note: 13 alternate optical profiles available upon request.
Contact Nemalux Sales representative for further details. Minimum order quantities, additional costs and lead times may apply.*


TEMPERATURE RANGE CHART:

MODEL	INPUT VOLTAGE	OPTICAL MODELS		FLOOD MODELS		ALL MODELS
		AMBIENT TEMP [°C]	CLASS I, DIV 2 T-CODES	AMBIENT TEMP [°C]	CLASS I, DIV 2 T-CODES	CLASS II, DIV 2 T-CODES
AR10	AC	-40 to 55	T3C	-40 to 55	T4A	T5
	HV	-40 to 54	T3C	-40 to 51	T4	T5
AR15	AC	-40 to 55	T3C	-40 to 55	T4A	T5
	HV	-40 to 54	T3C	-40 to 51	T4	T5
AR20	AC	-40 to 55	T3C	-40 to 55	T4A	T5
	HV	-40 to 54	T3C	-40 to 51	T4	T5
AR25	AC	-40 to 51	T3C	-40 to 55	T4A	T5
	HV	-40 to 44	T3B	-40 to 50	T4A	T5
AR30	AC	-40 to 43	T3	-40 to 42	T4A	T5
	HV	-40 to 43	T3	-40 to 40	T3	T5

PHOTOMETRICS

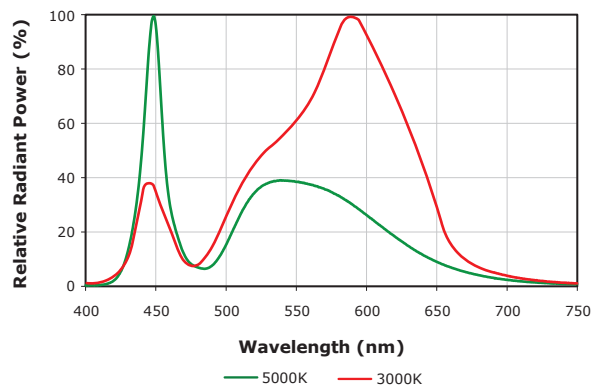


DIMMING

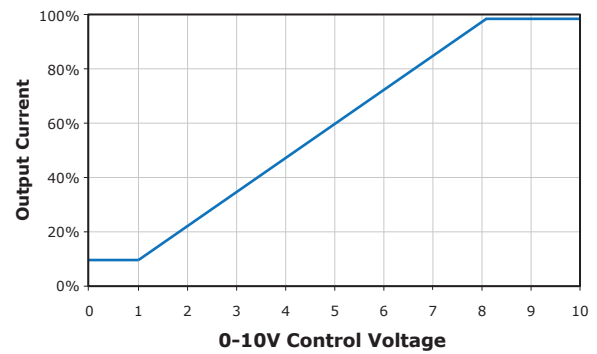


- Driver will source a maximum of 200uA for control needs
- Controller must sink current from the 0-10V control leads

MOUNTING OPTIONS (Ordered Separately)


SURFACE/SUSPENDED MOUNT (AR-SM): 16.8 kg | 37 lbs

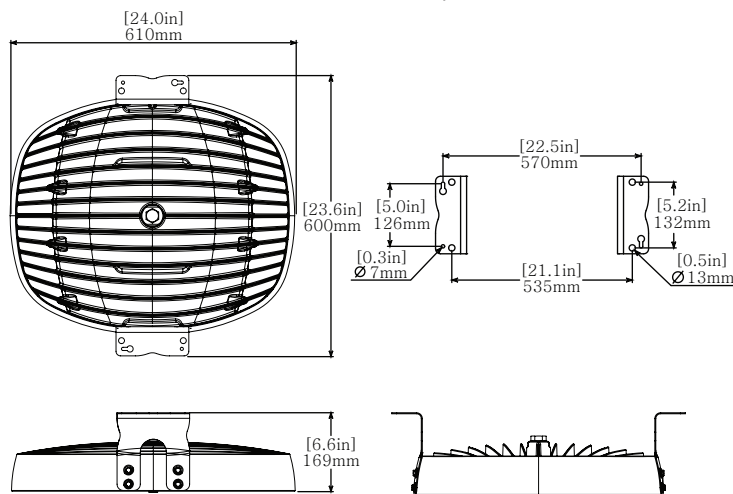


POLE MOUNT (AR-PM): 17.3 kg | 38 lbs | EPA: 0.07 m² / 0.72 ft²

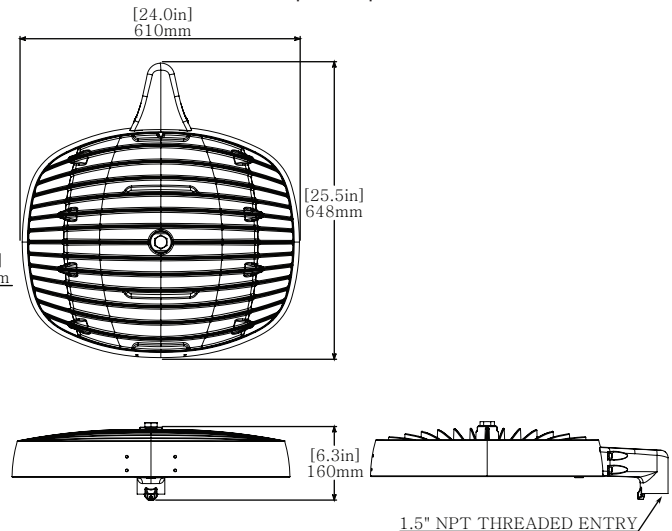


WALL MOUNT 2 (AR-WM2): 17.6 kg | 38.5 lbs

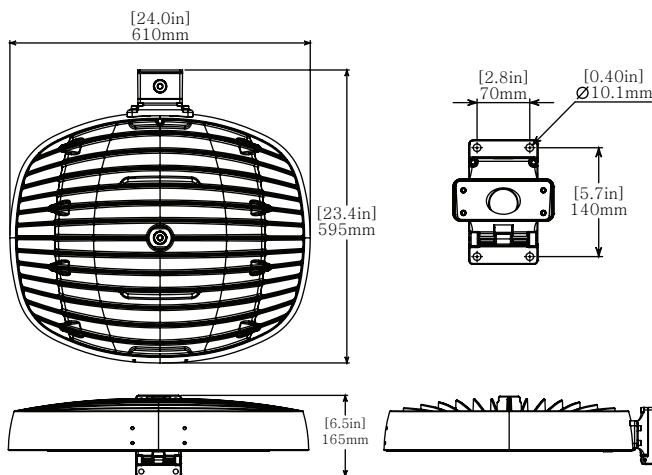

YOKE MOUNT (AR-YM): 18.0 kg | 39.6 lbs | EPA: 0.28 m² / 3.06 ft²

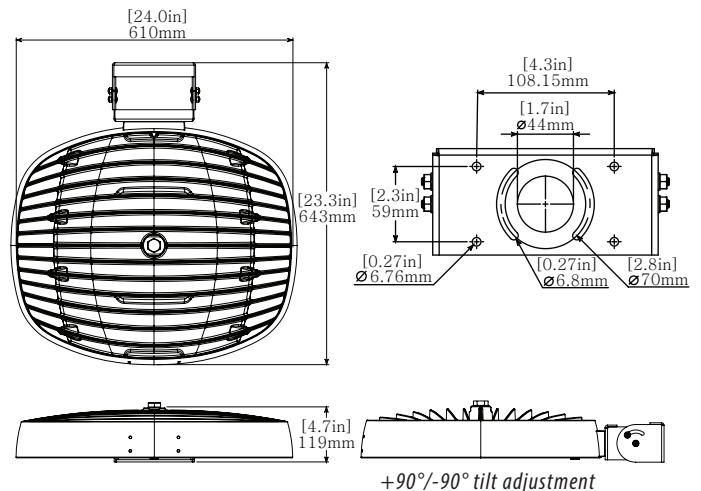


HIGH VIBRATION YOKE (AR-YK): 23.8 kg | 52.5 lbs | EPA: 0.37 m² / 3.97 ft²

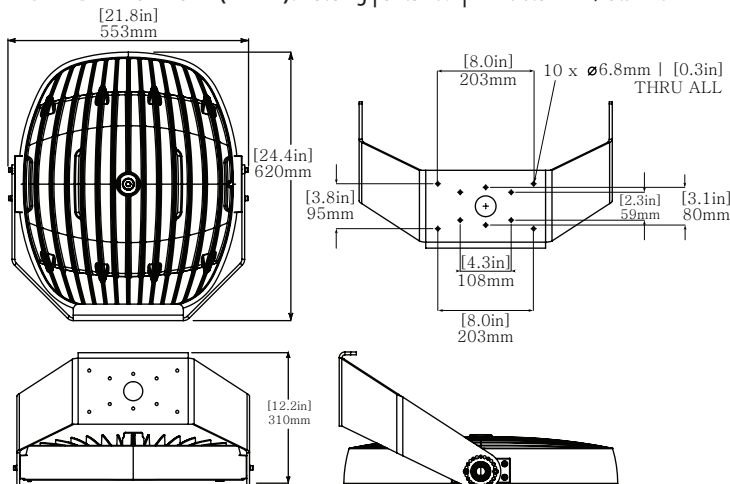


MOUNTING OPTIONS (Ordered Separately)

SLIP FITTER YOKE MOUNT (AR-SFY): 18.35 kg | 40.3 lbs | EPA: 0.3 m² / 3.24 ft²

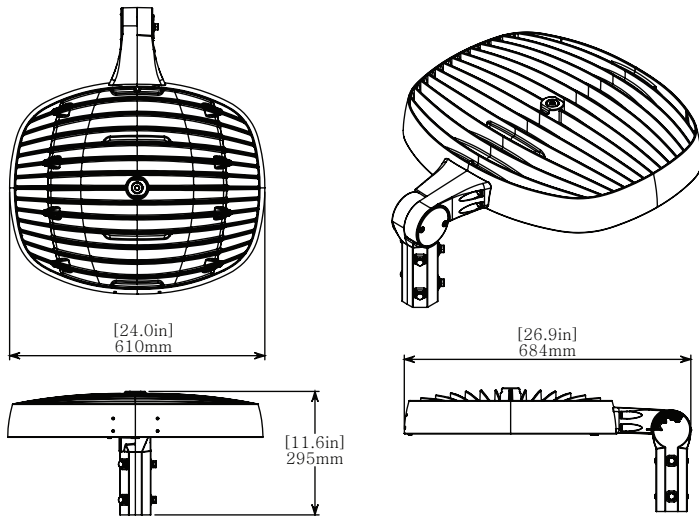


Stepped to accept either 1.5" Trade size (1-13/16" [46mm] to 2" [50mm] OD) & 2" Trade size (2-1/8" [53mm] to 2-7/16" [63mm])


THREADED ADJUSTABLE POLE MOUNT (AR-SFY-1.5): 17.4 kg | 39.5 lbs
EPA: 0.3 m² / 3.24 ft²

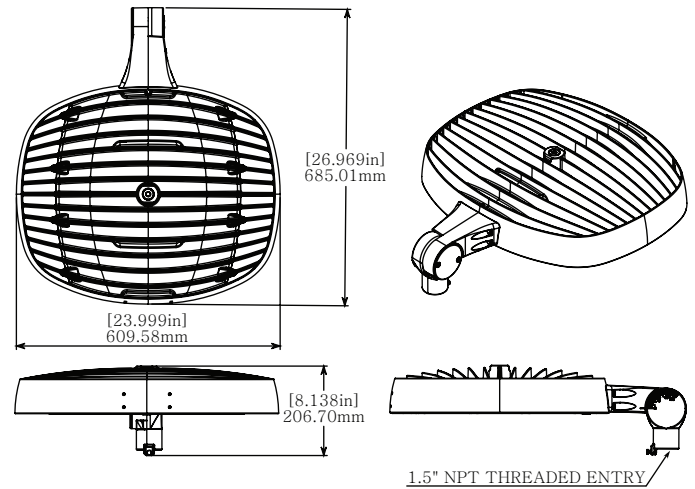

HOOK PENDANT (AR-HK): 16.8 kg | 36.9 lbs

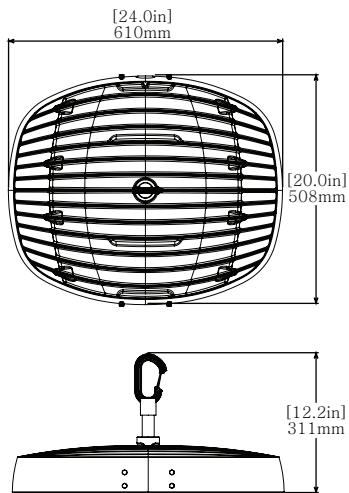

SECONDARY SAFETY KIT (AR-SK-##)



##represents the safety chain length in feet (i.e. 05=5', 10=10'). Secondary Safety Kit contains bracket, stainless steel chain (1/8 trade size), and two stainless steel oval threaded connecting links.

ORDERING INFORMATION

PROJECT NAME		TYPE
PROJECT LOCATION		
COMMENT		DATE
PREPARED BY		

MODEL SELECTOR

Sample Number: AR30-50-WC-GY-HZ-AC

MODEL	CCT	OPTIC	FINISH	LOCATION	POWER
-	-	-	GY	HZ	-
AR10⁵ AR15⁵ AR20⁵ AR25⁵ AR30⁵	30 - 3,000K 40 - 4,000K 50 - 5,000K Custom CCT options are available. Please contact for details. ¹	WC - Wide Beam (No optics) Special Order: T1 - IESNA Type 1 ¹ T2 - IESNA Type 2 ¹ T3 - IESNA Type 3 ¹ T4 - IESNA Type 4 ¹ T5 - IESNA Type 5 ¹ Custom optic options are available. Please contact for details. ¹	GY - Grey Custom finish options are available. Please contact for details. ¹	HZ - Hazardous Locations	AC - 120-277VAC HV - 347-480VAC

ACCESSORIES (Order Separately)

Sample Number: AR-WM2-GY

ACCESSORY	
<i>All options below are rated for hazardous location use with the AR Series</i>	
AR-SM	- AR Series; Surface Mount ²
AR-PM-GY	- AR Series; Pole Mount; Grey Finish ³
AR-WM2-GY	- AR Series; Wall Mount 2; Grey Finish ³
AR-YM	- AR Series; Yoke Mount ²
AR-YK	- AR Series; High Vibration Yoke Mount ²
AR-SFY-GY-HZ	- AR Series; Slip Fitter Yoke Mount; Grey Finish; Hazardous Location
AR-SFY-1.5-GY-HZ	- AR Series; Threaded Adjustable Pole Mount; Grey Finish; Hazardous Location
AR-HK-GY	- AR Series; Hook Pendant Mount; Grey Finish
AR-SK-##	- AR Series; Secondary Safety Kit; Length in Feet ^{2,4}
AR-SP-AC	- AR Series; Surge Suppressor ⁶
AR-SP-HV	- AR Series; Surge Suppressor ⁶

NOTES:

1. Minimum order quantities, additional costs and lead times may apply.
2. Only available in stainless steel finish.
3. IDA Fixture Seal of Approval only applies to fixtures with a CCT of 3000K or less, and have fixed mounts aiming the fixture perpendicular to the ground.
4. ## represents the safety chain length in feet (i.e. 05=5'; 10=10').
Secondary safety kit contains bracket, stainless steel chain (1/8 trade size), and two stainless steel oval threaded connecting links.
5. See DLC listed models chart.
6. See surge suppressor options.

DLC listed models chart:

DesignLights Consortium (DLC) v5.1 Qualified LED Luminaire Listings			
Model No.	Category	General Application	Classification
AR10-50-WC-xx-xx-AC	Outdoor Luminaires	High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard
AR15-50-WC-xx-xx-[AC,HV]	Outdoor Luminaires	High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard
AR20-50-WC-xx-xx-[AC,HV]	Outdoor Luminaires	High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard
AR25-50-WC-xx-xx-[AC,HV]	Outdoor Luminaires	High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard
AR30-50-WC-xx-xx-[AC,HV]	Outdoor Luminaires	Very High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard

Surge suppressor options:

AR-SP-AC – 277V FOR USE WITH -AC AR MODELS

-Protects against surges and transients per ANSI C62.41-2002 category C high (10KV, 1.2/50µs & 10KA, 8/20µs) standard Combo waves and (6KV, 100KHz) Ring wave

-Protects against surges and transients per new ANSI C82.77-5 2015 category C high (20KV, 1.2/50µs & 10KA, 8/20µs) standard Combo waves and (6KV, 100KHz) Ring wave

AR-SP-HV – 480V FOR USE WITH -HV AR MODELS

-Protects against surges and transients per ANSI C62.41-2002 category C high (10KV, 1.2/50µs & 10KA, 8/20µs) standard Combo waves and (6KV, 100KHz) Ring wave

-Protects against surges and transients per new ANSI C82.77-5 2015 category C high (20KV, 1.2/50µs & 10KA, 8/20µs) standard Combo waves and (6KV, 100KHz) Ring wave