



A Cooper Lighting Solutions business

STANDARD STOCKING GUIDE

Made & Stocked in Calgary, Alberta, Canada

Our Commitment B4 Light

- ✓ Better Services
- ✓ Better Products
- ✓ Better Lead Times
- ✓ Better Prices

December 2025




**Harsh & Hazardous
Location Lighting**





Nemalux LED lighting fixtures are suitable for challenging applications. Offering explosion proof and hazardous location rated lights using solid state technology.

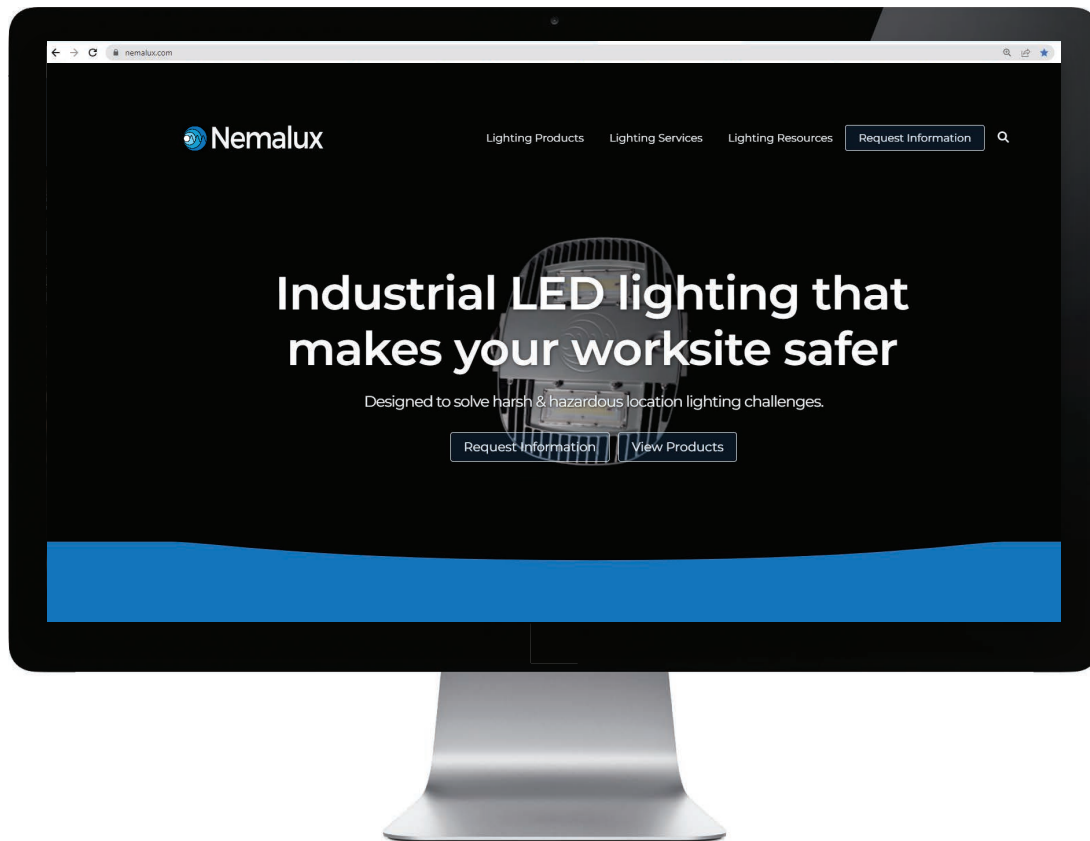

VISIT THE **NEMALUX WEBSITE**

Your one-stop shop for tools and resources designed to help grow your business.



- ✓ **Products**
- ✓ **Services**
- ✓ **Resources**
- ✓ **Use Cases**

READILY-AVAILABLE INDUSTRIAL LIGHTING SOLUTIONS FROM NEMALUX

The Nemalux Standard Stocking Guide program provides our customers with industrial LED lighting products designed to solve harsh & hazardous location lighting challenges, making your worksite safer. These products are in stock and ready to ship to meet your project needs.

2-3 week Lead Times ensure our customers receive the fixtures they need on their timeline.

WHY NEMALUX?

Durable Lighting Technology:

LED luminaires for harsh and hazardous location use. Human centric lighting improves safety and productivity.

Versatile Deployment Options:

Light fixtures featuring various optical and mounting options. Tailored lighting systems to address challenging projects.

Lifetime Value:


Lower initial cost, simplified installation, and system longevity result in excellent value.

Expert Support Services:


In-house lighting design and product engineering expertise. Lighting outcome-based philosophy vs a simplistic product-centric approach.

Short Lead Times:

An extensive component stocking program with just-in-time manufacturing from our Canadian facility.



**Download our
Product Catalog**



OUR CERTIFIED LIGHTS AND THE APPLICATIONS WE SERVE



Markets We Service

- Water Treatment Plants
- Critical Infrastructure
- Military & Aerospace
- Chemical Processing
- Pulp & Paper
- Original Equipment Manufacturers
- General Industrial Workplaces
- Areas Prone to Flooding
- Power Generation
- Panel Shops
- Oil & Gas
- Marine
- Tunnels
- Mining
- Rail

Ratings



Class I Division 1



Class I Division 2

Certifications



UL Certification



ETL Certification



DLC Certification



IDA Certification
(Dark Sky)



ABS Certification
(American Bureau of Shipping)



LabTest Certification

Products in stock

6 | JR Series

8 | MR Series

10 | XR Series

12 | AR Series

14 | GS Series

16 | BL Series

18 | NL Series

20 | EXC Series

21 | Top Hat



PRODUCT FAMILIES

Nemalux LED lighting fixtures are suitable for challenging applications. Offering explosion proof and hazardous location rated lights using solid state technology.

► Multi-functional Luminaires



JR Series



MR Series



XR Series



AR Series

► Linear Luminaires



GS Series



BL Series



NL Series

► Specialty Luminaires



EXC Series

► Top Hat Retrofit Adapter



Top Hat

Key Advantages



Thermal Design



Optical Design



Mechanical Design



Serviceability



Efficient Delivery

2,000 - 5,000 Lumen Compact Luminaire

- Compact and multi-functional luminaire for challenging applications
- Thermal separation of LED and power supply allows max ambient temperatures of up to +60°C
- Marine grade copper-free aluminum housing with multi-layer powder coated finish
- Approved for through-wiring of multiple luminaires on a single circuit
- Available in two lumen output models
- 3x 3/4" NPT entries
- 0-10V dimmable



webpage



MODEL SELECTOR

Sample Number: JR4-50-GWC-GY-HZ-AC

MODEL	COLOUR	LENS OPTIC	FINISH	LOCATION	POWER
-	50	-	GWC	-	AC
JR2 JR4	50 - 5,000K, 70CRI	GWC - Wide Beam with Clear Glass Lens	GY - Grey	HZ - Hazardous Location GN - General Location	AC - 120-277VAC (50/60Hz) HV - 347VAC* (50/60Hz) *Approved for General Location use only

ACCESSORIES (Order Separately)


Sample Number: JR-SM

ACCESSORY	FINISH
-	-
JR-SM - Surface/Suspended Mount ¹	GY - Grey
JR-PM - Pole Mount	
JR-WM2 - Wall Mount 2	
JR-HK - Pendant Hook Mount	
JR-YM - Yoke Mount ¹	
JR-YK - High Vibration Yoke Mount ¹	
JR-CC - Conduit Rotation Lock Mount	
JR-SFY - Slip Fitter Yoke Mount	

NOTES:

1. Only available in stainless steel finish.

DIMENSIONS

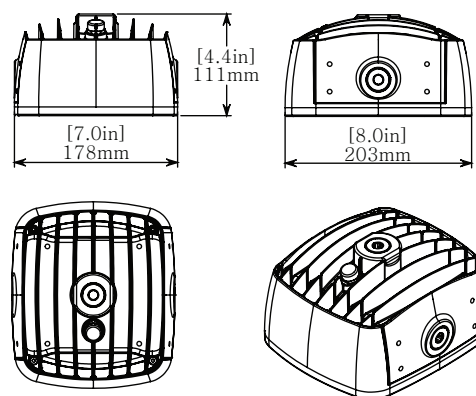

LUMEN RANGE

MODEL	LUMENS
JR2	2,874
JR4	5,227



PART NUMBER	DESCRIPTION
	Link to JR General Location Specification Sheet
JR2-50-GWC-GY-GN-AC	JR 2 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
JR2-50-GWC-GY-GN-HV	JR 2 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 347VAC
JR4-50-GWC-GY-GN-AC	JR 4 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
JR4-50-GWC-GY-GN-HV	JR 4 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 347VAC
	Link to JR Hazardous Location Specification Sheet
JR2-50-GWC-GY-HZ-AC	JR 2 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
JR4-50-GWC-GY-HZ-AC	JR 4 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
ACCESSORY	MOUNT OPTIONS
JR-SM	JR SERIES; SURFACE/SUSPENDED MOUNT
JR-YM	JR SERIES; YOKE MOUNT
JR-SFY-GY	JR SERIES; ADJUSTABLE SLIP FITTER MOUNT; GREY FINISH
JR-SFY-GY-HZ	JR SERIES; ADJUSTABLE SLIP FITTER MOUNT; GREY FINISH; HAZARDOUS LOCATION
JR-PM-GY	JR SERIES; POLE MOUNT; GREY FINISH
JR-WM2-GY	JR SERIES; WALL MOUNT 2; GREY FINISH
JR-HK-GY	JR SERIES; HANGING PENDANT MOUNT; GREY FINISH
JR-CC-GY	JR SERIES; ANTI ROTATION LOCK FOR CONDUIT MOUNT; GREY FINISH

JR ACCESSORIES MOUNTS



JR-SM



JR-YM



JR-SFY-GY-HZ



JR-PM-GY



JR-WM2-GY



JR-HK-GY



JR-CC-GY

MR Series Multi-functional Luminaire

3,000 - 6,000 Lumen Multi-Functional Luminaire

- Designed for marine, harsh, and hazardous location use
- Thermal separation of LED and power supply allows max ambient temperatures of up to +55°C
- Several optical distribution patterns for superior lighting quality
- Approved for through-wiring of several units on a single circuit



webpage



MODEL SELECTOR

Sample Number: MR6-50-WF-GY-HZ-AC

MODEL	COLOUR	OPTIC	FINISH	LOCATION	POWER
-	-	GY	GY	-	-
MR3 MR6 ³	30 - 3000K 50 - 5000K	WF - Wide Beam (No Optics)	GY - Grey	HZ - Hazardous Location GN - General Location	AC - 120-277VAC HV - 347VAC

ACCESSORIES (Order Separately)


Sample Number: MR-WM2-GY

ACCESSORY	FINISH	LOCATION
-	GY	HZ
MR-SM MR-WM2 MR-PM MR-HK MR-CC MR-YM MR-SFY MR-SFY-1.5	- Surface Mount ¹ - Wall Mount 2 - Pole Mount - Hook Pendant Mount - Conduit Connection - Yoke Mount ¹ - Slip Fitter Yoke Mount - Threaded Adjustable Pole Mount	GY - Grey HZ - Hazardous Location ²

NOTES:

1. Surface mount & Yoke mount only available in stainless steel finish.
2. HZ only applicable to slip fitter yoke mount (MR-SFY-GY-HZ).
3. See DLC listed models chart.

DIMENSIONS

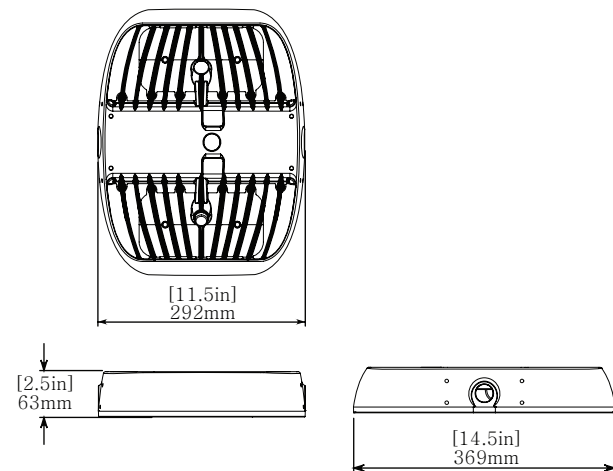

LUMEN RANGE

MODEL	LUMENS
MR3 MR6 ³	3,393 6,283

DLC listed models chart:

DesignLights Consortium (DLC) v5.1 Qualified LED Luminaire Listings			
Model No.	Category	General Application	Classification
MR6-[50,CW]-WF-xx-yy-[AC,HV]-zz	Outdoor Luminaires	Mid Output	DLC Standard



PART NUMBER	DESCRIPTION
	Link to MR General Location Specification Sheet
MR3-30-WF-GY-GN-AC	MR 3 SERIES; 3000K; WIDE BEAM (NO OPTICS); GREY FINISH; GENERAL LOCATION; 120-277VAC
MR3-30-WF-GY-GN-HV	MR 3 SERIES; 3000K; WIDE BEAM (NO OPTICS); GREY FINISH; GENERAL LOCATION; 347 VAC
MR3-50-WF-GY-GN-AC	MR 3 SERIES; 5000K; WIDE BEAM (NO OPTICS); GREY FINISH; GENERAL LOCATION; 120-277VAC
MR3-50-WF-GY-GN-HV	MR 3 SERIES; 5000K; WIDE BEAM (NO OPTICS); GREY FINISH; GENERAL LOCATION; 347 VAC
MR6-30-WF-GY-GN-AC	MR 6 SERIES; 3000K; WIDE BEAM (NO OPTICS); GREY FINISH; GENERAL LOCATION; 120-277VAC
MR6-30-WF-GY-GN-HV	MR 6 SERIES; 3000K; WIDE BEAM (NO OPTICS); GREY FINISH; GENERAL LOCATION; 347 VAC
MR6-50-WF-GY-GN-AC	MR 6 SERIES; 5000K; WIDE BEAM (NO OPTICS); GREY FINISH; GENERAL LOCATION; 120-277VAC
MR6-50-WF-GY-GN-HV	MR 6 SERIES; 5000K; WIDE BEAM (NO OPTICS); GREY FINISH; GENERAL LOCATION; 347 VAC
	Link to MR Hazardous Location Specification Sheet
MR3-30-WF-GY-HZ-AC	MR 3 SERIES; 3000K; WIDE BEAM (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
MR3-30-WF-GY-HZ-HV	MR 3 SERIES; 3000K; WIDE BEAM (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 347 VAC
MR3-50-WF-GY-HZ-AC	MR 3 SERIES; 5000K; WIDE BEAM (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
MR3-50-WF-GY-HZ-HV	MR 3 SERIES; 5000K; WIDE BEAM (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 347 VAC
MR6-30-WF-GY-HZ-AC	MR 6 SERIES; 3000K; WIDE BEAM (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
MR6-30-WF-GY-HZ-HV	MR 6 SERIES; 3000K; WIDE BEAM (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 347 VAC
MR6-50-WF-GY-HZ-AC	MR 6 SERIES; 5000K; WIDE BEAM (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
MR6-50-WF-GY-HZ-HV	MR 6 SERIES; 5000K; WIDE BEAM (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 347 VAC
ACCESSORIES	MOUNT OPTIONS
MR-SM	MR SERIES; SURFACE MOUNT
MR-YM	MR SERIES; YOKE MOUNT
MR-SFY-GY	MR SERIES; SLIP FITTER YOKE MOUNT; GREY FINISH
MR-SFY-GY-HZ	MR SERIES; SLIP FITTER YOKE MOUNT; GREY FINISH; HAZARDOUS LOCATION
MR-SFY-1.5-GY	MR SERIES; THREADED ADJUSTABLE POLE MOUNT; GREY FINISH
MR-SFY-1.5-GY-HZ	MR SERIES; THREADED ADJUSTABLE POLE MOUNT; GREY FINISH; HAZARDOUS LOCATION
MR-WM2-GY	MR SERIES; WALL MOUNT 2; GREY FINISH
MR-PM-GY	MR SERIES; POLE MOUNT; GREY FINISH
MR-HK-GY	MR SERIES; HANGING PENDANT; GREY FINISH
MR-CC-GY	MR SERIES; ANTI ROTATION LOCK FOR CONDUIT MOUNT; GREY FINISH

MR ACCESSORIES MOUNTS



XR Series Multi-functional Luminaire

8,000 - 20,000 Lumen Versatile Luminaire

- Designed for marine, harsh, and hazardous location use
- Thermal separation of LED and power supply allows max ambient temperatures of up to +75°C
- Wide range of optical distribution patterns for superior lighting quality
- Approved for through-wiring of several units on a single circuit



webpage



MODEL SELECTOR

Sample Number: XR20-50-GWC-GY-HZ-AC

MODEL	COLOUR	OPTIC	FINISH	LOCATION	POWER
-	50	-	GY	-	-
XR8 ³ XR10 ³ XR12 ³ XR15 ³ XR17 ³ XR20 ³	50 - 5000K, 70CRI	GWC - Wide Beam (No Optics) with Clear Glass Lens	GY - Grey	HZ - Hazardous Location GN - General Location	AC - 120-277VAC HV - 347-480VAC

ACCESSORIES (Ordered Separately)

Sample Number: XR-WM2-GY

ACCESSORY	FINISH	LOCATION
-	GY	-
XR-SM XR-PM XR-WM2 XR-HK XR-YM XR-YK XR-CC XR-SFY XR-SFY-1.5	- Surface/Suspended Mount ¹ - Pole Mount - Wall Mount 2 - Hanging Pendant Mount - Yoke Mount ¹ - High Vibration Yoke Mount ^{1†} - Conduit Rotation Lock Mount - Slip Fitter Yoke Mount ¹ - Threaded Adjustable Pole Mount	GY - Grey HZ - Hazardous Location ²

DLC listed models chart:

DesignLights Consortium (DLC) v5.1 Qualified LED Luminaire Listings			
Model No.	Category	General Application	Classification
XR8-50-WC-xx-GN-AC	Outdoor Luminaires	Mid Output	DLC Premium
XR8-50-WC-xx-HZ-AC	Outdoor Luminaires	Mid Output	DLC Standard
XR10-50-WC-xx-GN-AC	Outdoor Luminaires	Mid Output	DLC Premium
XR10-50-WC-xx-HZ-AC	Outdoor Luminaires	Mid Output	DLC Standard
XR15-50-WC-xx-GN-AC	Outdoor Luminaires	High Output	DLC Premium
XR15-50-WC-xx-GN-AC	Indoor Luminaires	High-Bay	DLC Standard
XR15-50-WC-xx-HZ-AC	Outdoor Luminaires	High Output	DLC Premium
XR15-50-WC-xx-HZ-AC	Indoor Luminaires	High-Bay	DLC Standard
XR20-50-WC-xx-GN-[AC,HV]	Outdoor Luminaires	High Output	DLC Premium
XR20-50-WC-xx-GN-[AC,HV]	Indoor Luminaires	High-Bay	DLC Standard
XR20-50-WC-xx-HZ-[AC,HV]	Outdoor Luminaires	High Output	DLC Premium
XR20-50-WC-xx-HZ-[AC,HV]	Indoor Luminaires	High-Bay	DLC Standard


NOTES:

1. Only available in stainless steel finish.
2. XR-SFY-GY-HZ > only applied to slip fitter yoke mount for hazardous locations.
3. See DLC listed models chart.

LUMEN RANGE

MODEL	LUMENS
XR8 ³	7,093
XR10 ³	8,267
XR12 ³	12,866
XR15 ³	15,723
XR17 ³	18,080
XR20 ³	20,550

DIMENSIONS

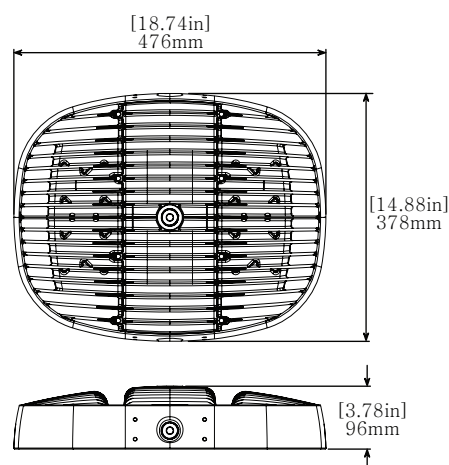

PART NUMBER	DESCRIPTION
	Link to XR General Location Specification Sheet
XR8-50-GWC-GY-GN-AC	XR 8 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
XR8-50-GWC-GY-GN-HV	XR 8 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
XR10-50-GWC-GY-GN-AC	XR 10 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
XR10-50-GWC-GY-GN-HV	XR 10 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
XR12-50-GWC-GY-GN-AC	XR 12 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
XR12-50-GWC-GY-GN-HV	XR 12 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
XR15-50-GWC-GY-GN-AC	XR 15 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
XR15-50-GWC-GY-GN-HV	XR 15 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
XR17-50-GWC-GY-GN-AC	XR 17 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
XR17-50-GWC-GY-GN-HV	XR 17 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
XR20-50-GWC-GY-GN-AC	XR 20 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
XR20-50-GWC-GY-GN-HV	XR 20 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
	Link to XR Hazardous Location Specification Sheet
XR8-50-GWC-GY-HZ-AC	XR 8 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
XR8-50-GWC-GY-HZ-HV	XR 8 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
XR10-50-GWC-GY-HZ-AC	XR 10 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
XR10-50-GWC-GY-HZ-HV	XR 10 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
XR12-50-GWC-GY-HZ-AC	XR 12 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
XR12-50-GWC-GY-HZ-HV	XR 12 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
XR15-50-GWC-GY-HZ-AC	XR 15 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
XR15-50-GWC-GY-HZ-HV	XR 15 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
XR17-50-GWC-GY-HZ-AC	XR 17 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
XR17-50-GWC-GY-HZ-HV	XR 17 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
XR20-50-GWC-GY-HZ-AC	XR 20 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
XR20-50-GWC-GY-HZ-HV	XR 20 SERIES; 5000K; WIDE BEAM GLASS LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
ACCESSORY	MOUNT OPTIONS
XR-SM	XR SERIES; SURFACE/SUSPENDED MOUNT
XR-YM	XR SERIES; YOKE MOUNT
XR-YK	XR SERIES; HIGH VIBRATION YOKE MOUNT
XR-SFY-GY	XR SERIES; SLIP FITTER ADJUSTABLE MOUNT; GREY FINISH
XR-SFY-GY-HZ	XR SERIES; SLIP FITTER YOKE MOUNT; GREY FINISH; HAZARDOUS LOCATION
XR-SFY-1.5-GY	XR SERIES; THREADED ADJUSTABLE POLE MOUNT; GREY FINISH
XR-SFY-1.5-GY-HZ	XR SERIES; THREADED ADJUSTABLE POLE MOUNT; GREY FINISH; HAZARDOUS LOCATION
XR-PM-GY	XR SERIES; POLE MOUNT; GREY FINISH
XR-WM2-GY	XR SERIES; WALL MOUNT 2; GREY FINISH
XR-HK-GY	XR SERIES; HANGING PENDANT MOUNT; GREY FINISH
XR-CC-GY	XR SERIES; ANTI ROTATION LOCK FOR CONDUIT MOUNT; GREY FINISH

XR ACCESSORIES MOUNTS



XR-SM

XR-YM

XR-YK

XR-SFY-GY-HZ

XR-SFY-1.5-GY-HZ

XR-PM-GY

XR-WM2-GY

XR-HK-GY

XR-CC-GY

AR Series Multi-functional Luminaire

10,000 - 48,000 Lumen High Output Luminaire

- Designed for marine, harsh, and hazardous location use
- Thermal separation of LED and power supply allows max ambient temperatures of up to +55°C
- Wide range of optical distribution patterns for superior lighting quality
- Approved for through-wiring of several units on a single circuit



MODEL SELECTOR (AR-GN/AR-HZ)

Sample Number: AR25-50-WC-GY-HZ-AC

MODEL	COLOUR	OPTIC	FINISH	LOCATION	POWER
-	50	WC	GY	-	-
AR25 ³ AR30 ³	50 - 5000K	WC - Wide Beam (No Optics)	GY - Grey	HZ - Hazardous Location GN - General Location	AC - 120-277VAC HV - 347-480VAC

MODEL SELECTOR (AR-H-GN)

Sample Number: AR40H-50-WC-GY-GN-AC

MODEL	COLOUR	OPTIC	FINISH	LOCATION	POWER
-	50	WC	GY	GN	-
AR40H AR45H AR50H	50 - 5000K	WC - Wide Beam (No Optics)	GY - Grey	GN - General Location	AC - 120-277VAC HV - 347-480VAC

ACCESSORIES (Order Separately)

Sample Number: AR-WM2-GY

ACCESSORY	FINISH	HAZLOC
-	GY	HZ
AR-SM AR-WM2 AR-HK AR-PM AR-YM AR-YK AR-SFY AR-SFY-1.5	- Surface Mount ¹ - Wall Mount 2 - Hook Pendant Mount - Pole Mount - Yoke Mount ¹ - High Vibration Yoke Mount ¹ - Slip Fitter Yoke Mount ⁵ - Threaded Adjustable Pole Mount	GY - Grey HZ - Hazardous Location ²


NOTES:

1. Only available in stainless steel finish.
2. HZ only applicable to slip fitter yoke mount (AR-SFY-GY-HZ).
3. See DLC listed models chart.

DLC listed models chart:

DesignLights Consortium (DLC) v5.1 Qualified LED Luminaire Listings			
Model No.	Category	General Application	Classification
AR10-50-WC-xx-xx-AC	Outdoor Luminaires	High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard
AR15-50-WC-xx-xx-[AC,HV]	Outdoor Luminaires	High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard
AR20-50-WC-xx-xx-[AC,HV]	Outdoor Luminaires	High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard
AR25-50-WC-xx-xx-[AC,HV]	Outdoor Luminaires	High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard
AR30-50-WC-xx-xx-[AC,HV]	Outdoor Luminaires	Very High Output	DLC Premium
	Indoor Luminaires	High-Bay	DLC Standard

DIMENSIONS

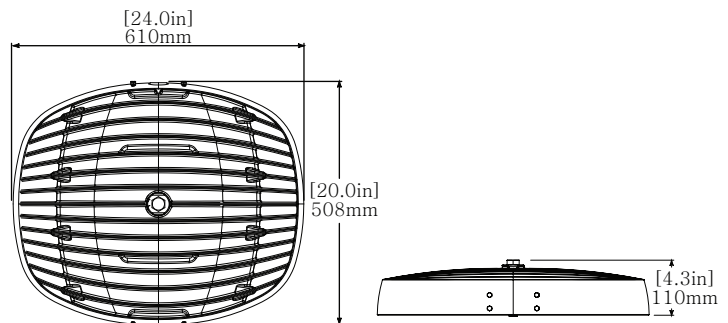

LUMEN RANGE

MODEL	LUMENS
AR25 ⁵	26,610
AR30 ⁵	33,190
AR40H ⁵	42,373
AR45H ⁵	45,490
AR50H ⁵	48,940



PART NUMBER	DESCRIPTION
	Link to AR General Location Specification Sheet
AR25-50-WC-GY-GN-AC	AR 25 Series; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 120-277VAC
AR25-50-WC-GY-GN-HV	AR 25 Series; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 347-480VAC
AR30-50-WC-GY-GN-AC	AR 30 Series; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 120-277VAC
AR30-50-WC-GY-GN-HV	AR 30 Series; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 347-480VAC
	Link to AR-H (High Output) General Location Specification Sheet
AR40H-50-WC-GY-GN-AC	AR40H SERIES; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 120-277VAC
AR40H-50-WC-GY-GN-HV	AR40H SERIES; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 347-480VAC
AR45H-50-WC-GY-GN-AC	AR45H SERIES; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 120-277VAC
AR45H-50-WC-GY-GN-HV	AR45H SERIES; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 347-480VAC
AR50H-50-WC-GY-GN-AC	AR50H SERIES; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 120-277VAC
AR50H-50-WC-GY-GN-HV	AR50H SERIES; 5000K; WIDE; GREY FINISH; GENERAL LOCATION; 347-480VAC
	Link to AR Hazardous Location Specification Sheet
AR25-50-WC-GY-HZ-AC	AR 25 Series; 5000K; WIDE; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
AR25-50-WC-GY-HZ-HV	AR 25 Series; 5000K; WIDE; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
AR30-50-WC-GY-HZ-AC	AR 30 Series; 5000K; WIDE; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
AR30-50-WC-GY-HZ-HV	AR 30 Series; 5000K; WIDE; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
ACCESSORY	MOUNT OPTIONS
AR-SM	AR SERIES; SURFACE/SUSPENDED MOUNT
AR-YM	AR SERIES; YOKE MOUNT
AR-YK	AR SERIES; HIGH VIBRATION YOKE MOUNT
AR-SFY-GY	AR SERIES; SLIP FITTER ADJUSTABLE MOUNT; GREY FINISH
AR-SFY-GY-HZ	AR SERIES; SLIP FITTER YOKE MOUNT; GREY FINISH; HAZARDOUS LOCATION
AR-SFY-1.5-GY	AR SERIES; THREADED ADJUSTABLE POLE MOUNT; GREY FINISH
AR-SFY-1.5-GY-HZ	AR SERIES; THREADED ADJUSTABLE POLE MOUNT; GREY FINISH; HAZARDOUS LOCATION
AR-WM2-GY	AR SERIES; WALL MOUNT2; GREY FINISH
AR-HK-GY	AR SERIES; HANGING PENDANT MOUNT; GREY FINISH
AR-PM-GY	AR SERIES; POLE MOUNT; GREY FINISH
AR-CM-GY	AR SERIES; ANTI ROTATION LOCK FOR CONDUIT MOUNT; GREY FINISH

AR ACCESSORIES MOUNTS



AR-SM

AR-YM

AR-YK

AR-SFY-GY-HZ

AR-SFY-1.5-GY-HZ

AR-PM-GY

AR-WM2-GY

AR-HK-GY

AR-CM-GY

500 - 5,000 Lumen Sealed Linear Luminaire



- Designed for marine, harsh, and hazardous location use
- Thermal separation of LED and power supply allows max ambient temperatures of up to +65°C
- Type II anodized housing withstands exposure to certain chemicals
- Vented enclosure to prevent stress on electronics and gaskets
- Lightweight housing for deployment in complex projects
- Adjustable mounting bracket allows for 360° rotation
- Factory wired with 3ft cable




MODEL SELECTOR

Sample Number: GS-1-50-W-BLK-H-24-66-A

MODEL	COLOUR	OPTIC	FINISH	LOCATION	VOLTAGE	INGRESS	MOUNT	
-	50	-	50	-	BLK	-	66	-
GS-1 GS-2 GS-3 GS-4	50 - 5000K	W - Wide Beam (No Optics)	BLK - Black	H - Hazardous Location O - Ordinary Location	120 - 120VAC 24 - 21-28VDC	66 - IP66	A - Adjustable B - Carriage Bolt	

DIMENSIONS

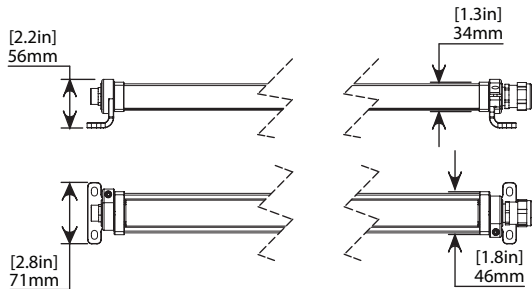

GS Series Fixture Length:

- GS-1 393mm [15.5in]
- GS-2 672mm [26.5in]
- GS-3 952mm [37.5in]
- GS-4 1231mm [48.5in]

LUMEN RANGE

MODEL	LUMENS
GS-1	582
GS-2	1,292
GS-3	2,003
GS-4	2,714




PART NUMBER	DESCRIPTION
	Link to GS-AC General Location Specification Sheet Link to GS-DC General Location Specification Sheet
GS-1-50-W-BLK-O-120-66-A	GS SERIES; ONE FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; ADJUSTABLE MOUNT
GS-1-50-W-BLK-O-120-66-B	GS SERIES; ONE FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-1-50-W-BLK-O-24-66-A	GS SERIES; ONE FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; ADJUSTABLE BRACKET
GS-1-50-W-BLK-O-24-66-B	GS SERIES; ONE FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-2-50-W-BLK-O-120-66-A	GS SERIES; TWO FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; ADJUSTABLE MOUNT
GS-2-50-W-BLK-O-120-66-B	GS SERIES; TWO FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-2-50-W-BLK-O-24-66-A	GS SERIES; TWO FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; ADJUSTABLE BRACKET
GS-2-50-W-BLK-O-24-66-B	GS SERIES; TWO FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-3-50-W-BLK-O-120-66-A	GS SERIES; THREE FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; ADJUSTABLE MOUNT
GS-3-50-W-BLK-O-120-66-B	GS SERIES; THREE FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-3-50-W-BLK-O-24-66-A	GS SERIES; THREE FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; ADJUSTABLE BRACKET
GS-3-50-W-BLK-O-24-66-B	GS SERIES; THREE FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-4-50-W-BLK-O-120-66-A	GS SERIES; FOUR FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; ADJUSTABLE MOUNT
GS-4-50-W-BLK-O-120-66-B	GS SERIES; FOUR FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-4-50-W-BLK-O-24-66-A	GS SERIES; FOUR FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; ADJUSTABLE BRACKET
GS-4-50-W-BLK-O-24-66-B	GS SERIES; FOUR FOOT; 5000K; WIDE BEAM; BLACK FINISH; GENERAL LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
	Link to GS-AC Hazardous Location Specification Sheet Link to GS-DC Hazardous Location Specification Sheet
GS-1-50-W-BLK-H-120-66-A	GS SERIES; ONE FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; ADJUSTABLE MOUNT
GS-1-50-W-BLK-H-120-66-B	GS SERIES; ONE FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-1-50-W-BLK-H-24-66-A	GS SERIES; ONE FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; ADJUSTABLE BRACKET
GS-1-50-W-BLK-H-24-66-B	GS SERIES; ONE FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-2-50-W-BLK-H-120-66-A	GS SERIES; TWO FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; ADJUSTABLE MOUNT
GS-2-50-W-BLK-H-120-66-B	GS SERIES; TWO FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-2-50-W-BLK-H-24-66-A	GS SERIES; TWO FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; ADJUSTABLE BRACKET
GS-2-50-W-BLK-H-24-66-B	GS SERIES; TWO FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-3-50-W-BLK-H-120-66-A	GS SERIES; THREE FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; ADJUSTABLE MOUNT
GS-3-50-W-BLK-H-120-66-B	GS SERIES; THREE FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-3-50-W-BLK-H-24-66-A	GS SERIES; THREE FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; ADJUSTABLE BRACKET
GS-3-50-W-BLK-H-24-66-B	GS SERIES; THREE FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-4-50-W-BLK-H-120-66-A	GS SERIES; FOUR FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; ADJUSTABLE MOUNT
GS-4-50-W-BLK-H-120-66-B	GS SERIES; FOUR FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 120 VAC 60Hz; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT
GS-4-50-W-BLK-H-24-66-A	GS SERIES; FOUR FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; ADJUSTABLE BRACKET
GS-4-50-W-BLK-H-24-66-B	GS SERIES; FOUR FOOT; 5000K; WIDE BEAM; BLACK FINISH; HAZARDOUS LOCATION; 22-28 VDC; IP66 INGRESS PROTECTION; CARRIAGE BOLT MOUNT

GS ACCESSORIES MOUNTS



A - ADJUSTABLE MOUNTING BRACKET



B - CARRIAGE BOLT/SURFACE MOUNT

BL Series Linear Luminaire

2,500 - 4,400 Lumen High Impact Linear Luminaire



- Designed for marine, harsh, and hazardous location use
- Copper-free aluminum housing with polycarbonate
- Approved for through-wiring of multiple units on a single circuit
- Lightweight replacement for conventional vapor-tight lights
- Built-in junction area for simplified termination



MODEL SELECTOR

Sample Number: BL40-50-GY-HZ-AC

MODEL	COLOUR	FINISH	LOCATION	VOLTAGE
-	50	GY	-	-
BL20 BL40	50 - 5000K, 70CRI	GY - Grey	HZ - Hazardous Location GN - General Location	AC - 120-277VAC HV - 347VAC ²

ACCESSORIES (Ordered Separately)³


Sample Number: BL-SM

ACCESSORY	FINISH
-	-
BL-R-CC - Pendant/Conduit Mount BL-SM - Surface Mount ¹ BL-WM - Wall Mount ¹ BL-YM - Adjustable Yoke Mount ¹ BL-HK - Hook Pendant Mount BL-TC - Tube Clamp Mount ¹	GY - Grey

NOTES:

1. Only available in stainless steel finish.
2. Approved for General Location use only.

DIMENSIONS

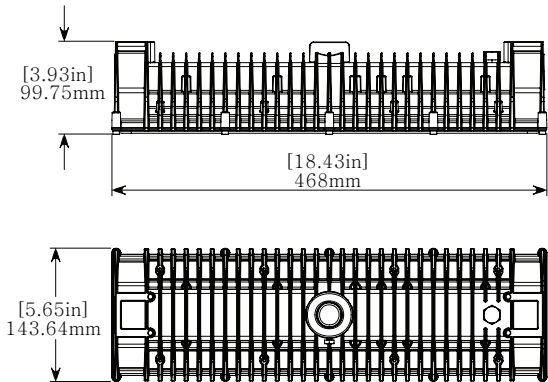


LUMEN RANGE

MODEL	LUMENS
BL20	2,540
BL40	4,475



PART NUMBER	DESCRIPTION
	Link to BL General Location Specification Sheet
BL20-50-GY-GN-AC	BL 20 SERIES; 5000K; GREY FINISH; GENERAL LOCATION; 120-277VAC
BL20-50-GY-GN-HV	BL 20 SERIES; 5000K; GREY FINISH; GENERAL LOCATION; 347VAC
BL40-50-GY-GN-AC	BL 40 SERIES; 5000K; GREY FINISH; GENERAL LOCATION; 120-277VAC
BL40-50-GY-GN-HV	BL 40 SERIES; 5000K; GREY FINISH; GENERAL LOCATION; 347VAC
	Link to BL Hazardous Location Specification Sheet
BL20-50-GY-HZ-AC	BL 20 SERIES; 5000K; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
BL40-50-GY-HZ-AC	BL 40 SERIES; 5000K; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
ACCESSORY	MOUNT OPTIONS
BL-SM	BL SERIES; SURFACE MOUNT
BL-WM	BL SERIES; WALL MOUNT
BL-YM	BL SERIES; ADJUSTABLE YOKE MOUNT
BL-HK-GY	BL SERIES; HOOK MOUNT; GREY FINISH
BL-TC	BL SERIES; TUBE CLAMP MOUNT
BL-R-CC-GY	BL SERIES; ANTI-ROTATION LOCK FOR CONDUIT MOUNT; GREY FINISH

BL ACCESSORIES MOUNTS

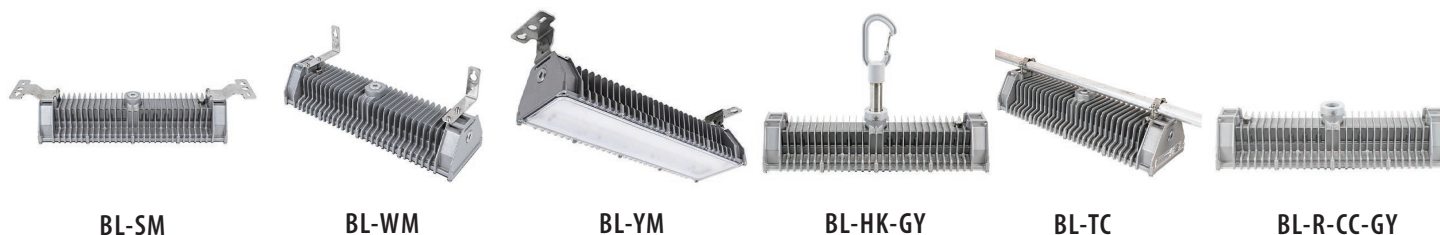

BL-SM

BL-WM

BL-YM

BL-HK-GY

BL-TC

BL-R-CC-GY

NL Series Linear Luminaire

4,000 - 14,000 Lumen Durable Linear Luminaire



- Designed for marine, harsh, and hazardous location use
- High-output linear LED replacement for legacy vapor-tight lights
- Copper-free, extruded aluminum housing with polycarbonate lens
- Approved for through-wiring of multiple units on a single circuit
- Angle adjustable mounting bracket allows for 360° rotation
- Built-in junction area for simplified termination



MODEL SELECTOR

Sample Number: NL2-X-50-WC-GY-GN-AC

MODEL	OUTPUT	COLOUR	OPTIC	FINISH	LOCATION	POWER
-	-	50	WC	GY	-	-
NL2 NL4	S - Standard H - High Output ¹ X - Extra High Output ¹	50 - Cool White (5000K)	WC - Wide Clear	GY - Grey	HZ - Hazardous Location GN - General Location	AC - 120-277VAC BB - 120-277VAC ^{1,2} w/ Battery Back-up HV - 347-480VAC

ACCESSORIES (Ordered Separately)


Sample Number: NL-AM-GY

ACCESSORY	FINISH
-	-
NL-SM - Surface Mount NL-AM - Angle Adj. Mount	GY - Grey

NOTES:

- Battery Backup (BB)
 - NL2S - 20% 90 min
 - NL2H - 15% 90 min
 - NL4S - 10% 90 min
 - Not available on NL2-X, NL4-H, NL4-X
- BB details
 - Input Current: 0.07 A
 - Input Wattage: 4 W
 - Recharge Time: 24 - 48 Hrs.

DIMENSIONS

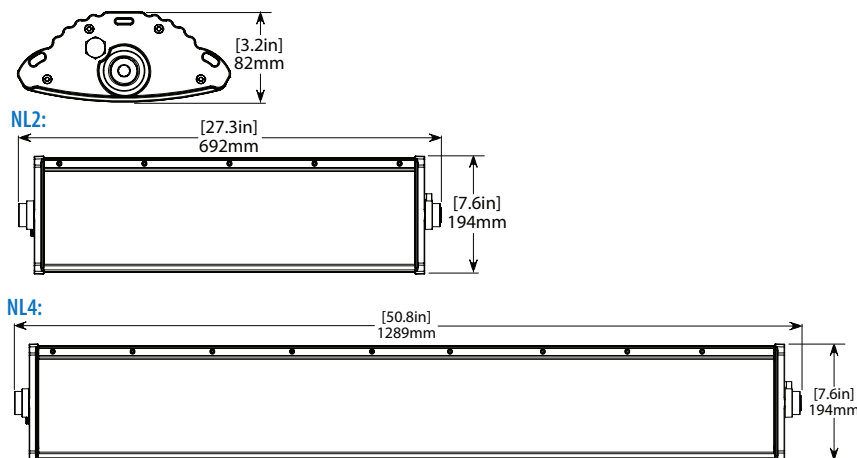


LUMEN RANGE

MODEL	LUMENS
NL2-S	3,970
NL2-H	5,143
NL2-X	7,965
NL4-S	8,697
NL4-H	10,470




PART NUMBER	DESCRIPTION
	Link to NL General Location Specification Sheet
NL2-S-50-WC-GY-GN-AC	NL2 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
NL2-S-50-WC-GY-GN-HV	NL2 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
NL2-H-50-WC-GY-GN-AC	NL2 SERIES; HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
NL2-H-50-WC-GY-GN-HV	NL2 SERIES; HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
NL2-X-50-WC-GY-GN-AC	NL2 SERIES; EXTRA HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
NL2-X-50-WC-GY-GN-HV	NL2 SERIES; EXTRA HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
NL4-S-50-WC-GY-GN-AC	NL4 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
NL4-S-50-WC-GY-GN-HV	NL4 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
NL4-H-50-WC-GY-GN-AC	NL4 SERIES; HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
NL4-H-50-WC-GY-GN-HV	NL4 SERIES; HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
NL4-X-50-WC-GY-GN-AC	NL4 SERIES; EXTRA HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC
NL4-X-50-WC-GY-GN-HV	NL4 SERIES; EXTRA HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 347-480VAC
	Link to NL General Location Specification Sheet (with 90min Battery Back-up)
NL2-S-50-WC-GY-GN-AC-BB	NL2 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC; 120-277VAC w/ 90MIN BATTERY BACK-UP
NL2-H-50-WC-GY-GN-AC-BB	NL2 SERIES; HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC; 120-277VAC w/ 90MIN BATTERY BACK-UP
NL4-S-50-WC-GY-GN-AC-BB	NL4 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; GENERAL LOCATION; 120-277VAC; 120-277VAC w/ 90MIN BATTERY BACK-UP
	Link to NL Hazardous Location Specification Sheet
NL2-S-50-WC-GY-HZ-AC	NL2 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
NL2-S-50-WC-GY-HZ-HV	NL2 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
NL2-H-50-WC-GY-HZ-AC	NL2 SERIES; HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
NL2-H-50-WC-GY-HZ-HV	NL2 SERIES; HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
NL2-X-50-WC-GY-HZ-AC	NL2 SERIES; EXTRA HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
NL2-X-50-WC-GY-HZ-HV	NL2 SERIES; EXTRA HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
NL4-S-50-WC-GY-HZ-AC	NL4 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
NL4-S-50-WC-GY-HZ-HV	NL4 SERIES; STANDARD OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
NL4-H-50-WC-GY-HZ-AC	NL4 SERIES; HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
NL4-H-50-WC-GY-HZ-HV	NL4 SERIES; HIGH OUTPUT; 5000K; WIDE CLEAR LENS; GREY FINISH; HAZARDOUS LOCATION; 347-480VAC
ACCESSORY	MOUNT OPTIONS
NL-AM-GY	NL SERIES; ANGLE ADJACENT MOUNT; GREY FINISH
NL-SM	NL SERIES; SURFACE MOUNT

NL ACCESSORIES MOUNTS




NL-AM-GY



NL-SM

1,200 Lumen Explosion Proof LED Luminaire

- Class I Division 1, Explosion-proof luminaire designed for confined space and low clearance applications
- Copper-free, marine-grade aluminum housing with glass lens
- No arcing, sparking, or hazardous temperature components
- Tested to withstand more than 2,500 psi internal pressure
- Built-in junction box with 3/4" NPT entries on three sides
- Thermally managed for maximum longevity

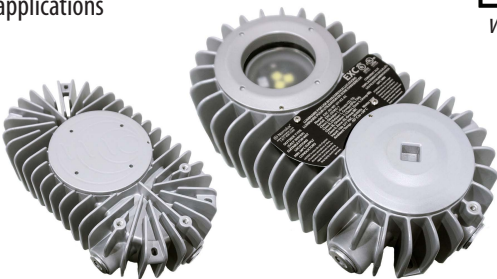

MODEL SELECTOR

Sample Number: EXC-50-WF-GY-HZ-AC

MODEL	COLOUR	OPTIC	FINISH	LOCATION	POWER
EXC -	50 -	WF -	GY -	HZ -	
EXC	50 - 5000K	WF - Wide Frosted (No optics)	GY - Grey	HZ - Hazardous Location	AC - 120-277VAC DC - 22-28VDC

ACCESSORIES (Order Separately)


Sample Number: EXC-YM

ACCESSORY
EXC-YM - Yoke Mount

LUMEN RANGE

MODEL	LUMENS
EXC	1,200

DIMENSIONS

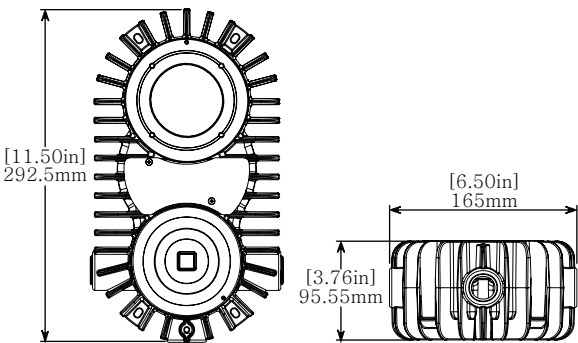

EXC MODELS IN STOCK

PART NUMBER	DESCRIPTION
	Link to EXC Specification Sheet
EXC-50-WF-GY-HZ-AC	EXC SERIES; 5000K; WIDE FROSTED (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 120-277VAC
EXC-50-WF-GY-HZ-DC	EXC SERIES; 5000K; WIDE FROSTED (NO OPTICS); GREY FINISH; HAZARDOUS LOCATION; 22-28VDC
ACCESSORY	MOUNT OPTIONS
EXC-YM	EXC SERIES; YOKE MOUNT

EXC ACCESSORIES MOUNTS



TOP HAT RETROFIT ADAPTER

NEM-TH-EA ADAPTER

- Allows upgrading of legacy Eaton Crouse-Hinds lights to LED technology
- Compatible with Nemalux's multi-functional JR, MR, XR, & BL Series
- Multi-layer powder coated finish for corrosion resistance
- High pressure die-cast aluminum construction

MODEL SELECTOR

Sample Part Number: NEM-TH-EA

ADAPTER	ASSEMBLY
NEM-TH-EA	-
NEM-TH-EA - Top Hat Adapter ¹	JR MR - JR Series ¹ XR - MR Series ¹ BL - XR Series ¹ BL - BL Series ¹

NOTES:


1. Fixture part numbers are required when selecting a complete assembly. For more information, refer to the corresponding product spec sheet or contact your local representative..



FIXTURE OPTIONS



DIMENSIONS

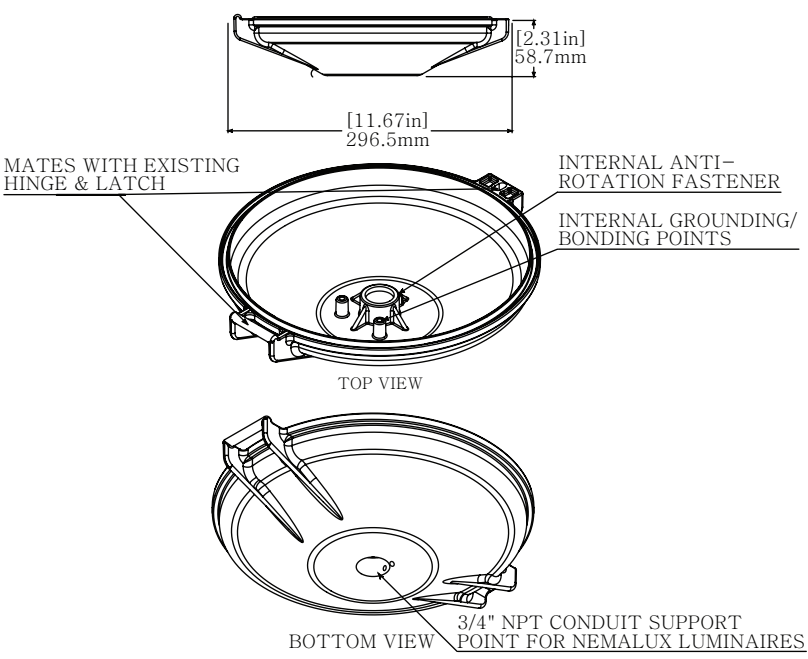

TOP HAT RETROFIT ADAPTER MODELS IN STOCK

PART NUMBER	DESCRIPTION
NEM-TH-EA-JR	TOP HAT RETROFIT ADAPTER; c/w JR SERIES
NEM-TH-EA-MR	TOP HAT RETROFIT ADAPTER; c/w MR SERIES
NEM-TH-EA-XR	TOP HAT RETROFIT ADAPTER; c/w XR SERIES
NEM-TH-EA-BL	TOP HAT RETROFIT ADAPTER; c/w BL SERIES

5 YEARS WARRANTY

CID2

LC us



Nemalux™

A Cooper Lighting Solutions business

1881 120th Ave NE | Calgary, AB T3K 0S5

P: 1.403.242.7475

F: 1.403.243.6190

E: info@nemalux.com

W: www.nemalux.com



COOPER

Lighting Solutions

a ignify business

Copyright© 2025 Nemalux, Rev. A4

Due to constant product development, details in this brochure are subject to change at any time. Contact us for the latest information.