

KEY FEATURES

- Designed for marine and industrial applications
- Optimized thermal management with extruded aluminum housing
- Type II anodized housing withstands exposure to certain chemicals
- Vented enclosure to prevent stress on electronics and gaskets
- Lightweight housing for deployment in complex projects
- Adjustable mounting bracket allows for 360° rotation
- Sealed housing provided with 3ft cable

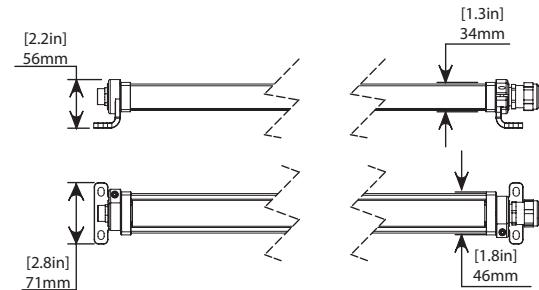


TECHNICAL SPECIFICATIONS / MAXIMUM RATINGS

HOUSING	Copper Free Aluminum and Polycarbonate Lens						
MOUNTING	See Page 2 for DETAILS						
VOLTAGE MAXIMUM	12: 16VDC 24: 28VDC 24H: 28VDC						
INPUT VOLTAGE	12: 11-16VDC 24: 22-28VDC 24H: 22-28VDC						
POWER (TYP)	12 Models: GS-1: 8.4W	GS-2: 16.8W	GS-3: 25.2W	GS-4: 33.6W			
	24 Models: GS-1: 8.4W	GS-2: 16.8W	GS-3: 25.2W	GS-4: 33.6W			
	24H Models: GS-1: 16.8W	GS-2: 33.6W	GS-3: 47.5W	GS-4: 64.0W			
CURRENT (TYP)	12 Models (@12 VDC): GS-1: 0.66A	GS-2: 1.30A	GS-3: 1.98A	GS-4: 2.64A			
	24 Models (@24 VDC): GS-1: 0.33A	GS-2: 0.66A	GS-3: 0.99A	GS-4: 1.32A			
	24H Models (@24 VDC): GS-1: 0.66A	GS-2: 1.32A	GS-3: 1.98A	GS-4: 2.65A			
CONNECTIONS	0.9m (3ft) Flying Lead (Custom Lengths Available)						
DIMMING	Can be dimmed via supply pulse modulation						
TEMPERATURE RANGE	-40°C to +60°C (Case ~30°C above ambient)						
CERTIFICATIONS	Certified to UL 2108; CSA 22.2 No. 250.0						
INGRESS PROTECTION	IP66/67	Suitable for wet locations. Marine Outside type (Salt water).					
COLOUR TEMP RANGE	50: 5000K	Special Order: 2700-6500K					
CRI VALUE (MIN)	50: 70						
TOTAL LUMENS	See Page 2 for DETAILS						
LUMEN MAINTENANCE	LM-80 > 60,500 hrs						
WEIGHT	See Page 2 for DETAILS						

* The ambient temperature during lifetime, lumen and chromaticity determination is 25°C ± 1°C.

DIMENSIONS





GS Series Fixture Length:

GS-1	393mm [15.5in]	
GS-2	672mm [26.5in]	
GS-3	952mm [37.5in]	
GS-4	1231mm [48.5in]	

WARRANTY

Five (5) year limited warranty to the original purchaser. The warranty covers defects in materials and workmanship under normal use and service.

For additional information see:
<https://nemalux.com/legal>

OPTIC OPTIONS

W - Wide 100°

N - Narrow 30°

Model	Lumens	
	12/24	24H
GS-1	578	1127
GS-2	1172	2285
GS-3	1758	3428
GS-4	2351	4584

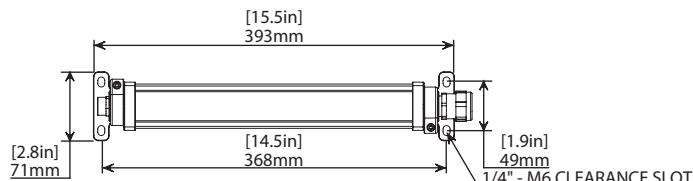
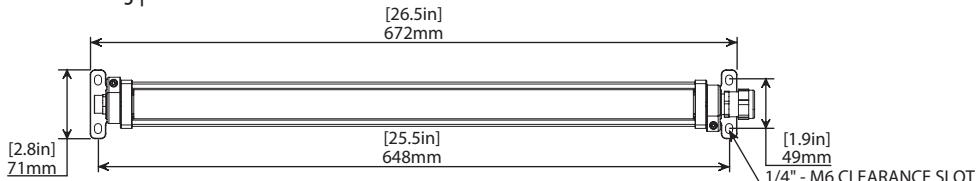
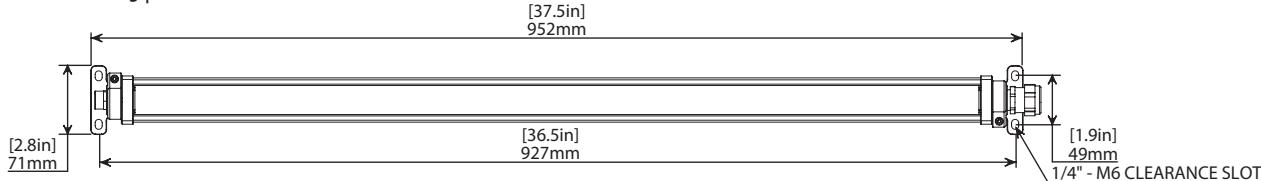
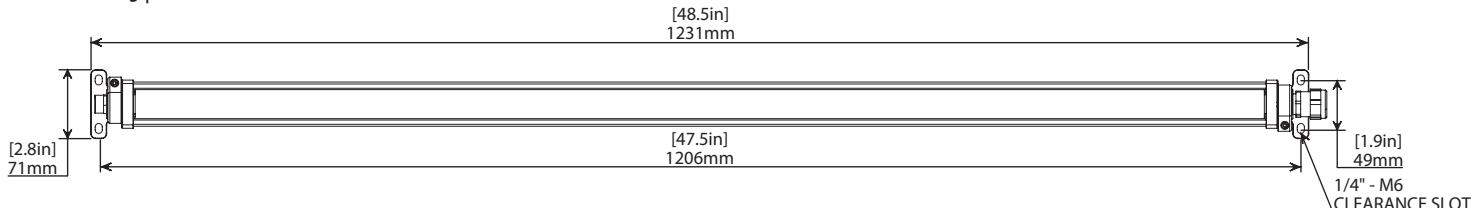
Model	Lumens	
	12/24	24H
GS-1	657	1281
GS-2	1310	2555
GS-3	1971	3843
GS-4	2628	5125

MOUNTING OPTIONS
A - ADJUSTABLE MOUNTING BRACKET


Easy 360° angle adjustment with 3mm Hex Key

B - CARRIAGE BOLT/SURFACE MOUNT


1/4"-20 x 1" Carriage Bolts

MOUNTING DIMENSIONS
GS-1 0.8 kg | 1.8 lbs

GS-2 1.2 kg | 2.6 lbs

GS-3 1.8 kg | 3.9 lbs

GS-4 2.4 kg | 5.3 lbs


ORDERING INFORMATION

PROJECT NAME		TYPE
PROJECT LOCATION		
COMMENT		DATE
PREPARED BY		

MODEL SELECTOR

Sample Number: GS-1-50-W-BLK-0-24-66-A

MODEL	COLOUR	OPTIC	FINISH	LOCATION	VOLTAGE	INGRESS	MOUNT
-	-	-	BLK	0	-	66	-
GS-1	50 - 5000K	W - Wide Beam (No Optics)	BLK - Black	0 - Ordinary Location	12 - 12-16VDC	66 - IP66	A - Adjustable
GS-2					24 - 21-28VDC		B - Carriage Bolt
GS-3					24H - 21-28VDC		
GS-4	Special Order: 30 - 3000K ^{1,2} 35 - 3500K ¹ 40 - 4000K ¹ 45 - 4500K ¹ 55 - 5500K ¹ 65 - 6500K ¹ R - Red ¹ G - Green ¹ B - Blue ¹ A - Amber ¹	Special Order: N - Narrow Beam 30°	Custom finishes are available. Please contact for details. ¹				

CUSTOM OPTIONS

WIRING

Other wire lengths available in 30 cm (1 ft) increments.¹

NOTES:

1. Minimum order quantities, additional costs and lead times may apply.
2. IDA Fixture Seal of Approval only applies to fixtures with a CCT of 3000K or less, and have fixed mounts aiming the fixture perpendicular to the ground.