


## LIGHTING THAT IMPROVES WORKSITE SAFETY




### JR Series

2,000 - 5,000 lumen fixture

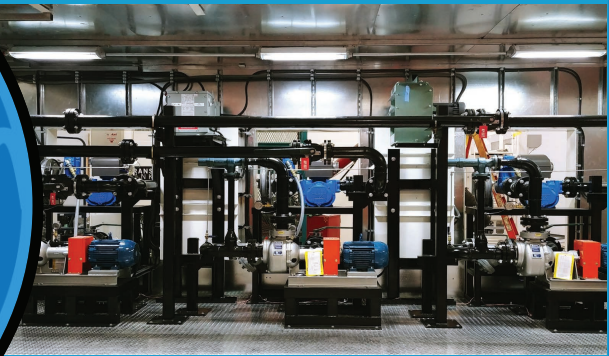

120-277 VAC | 347 VAC\*  
2.58 kg | 5.68 lbs  
7.0" x 8.0" x 4.4"  
-40°C to +60°C  
IP66 / IP67 / IP68\*



### GS Series

582 - 5,125 lumen fixture

4 Lengths  
120 VAC | 12 VDC | 24 VDC  
-40°C to +65°C  
IP66 / IP67 / IP68\*




### LS Series

1,550 lumens per module



120 VAC  
12 kg | 2.6 lbs per module  
9.7" x 3.3" per module  
-50°C to +70°C  
IP66 / IP67



### MR Series

3,000 - 6,000 lumen fixture



120-277 VAC | 347 VAC  
4.6 kg | 10.4 lbs  
14.5" x 11.5" x 2.5"  
-40°C to +55°C  
IP66 / IP67 / IP68\*



### BL Series

2,540 - 4,475 lumen fixture

120 VAC | 347 VAC\*  
2.9 kg | 6.4 lbs  
18.43" x 5.65" x 3.93"  
-50°C to +65°C  
IP66 / IP68\*



### CANLED Series

469 - 587 lumen fixture



12-24 VDC  
1.04 kg | 2.3 lbs  
Ø3.47" x 5.29"  
-40°C to +55°C  
IP66



### XR Series

8,000 - 20,000 lumen fixture



120-277 VAC | 347-480 VAC  
8.1 kg | 17.8 lbs  
18.74" x 14.88" x 3.78"  
-50°C to +75°C  
IP66 / IP68\*



### NL Series

3,970 - 14,313 lumen fixture

2 Lengths  
120-277 VAC | 347-480 VAC  
-40°C to +55°C  
IP66



### XCANLED Series

1,996 - 2,334 lumen fixture



12-24 VDC  
4.3 kg | 9.5 lbs  
Ø7.0" x 5.0"  
-40°C to +55°C  
IP66



### AR Series

10,000 - 48,000 lumen fixture



120-277 VAC | 347-480 VAC  
16.4 kg | 36.0 lbs  
24.0" x 20.0" x 4.3"  
-40°C to +55°C  
IP66 / IP67



### EXC Series

1,220 lumen fixture

120-277 VAC | 22-28 VDC  
4.4 kg | 9.8 lbs  
11.5" x 6.5" x 3.76"  
-40°C to +55°C  
IP66



### ZLM Series

22,000 - 28,000 lumen fixture\*



120-277 VAC  
10.0 kg | 22.0 lbs  
15.5" x 6.8" x 7.1"  
-40°C to +45°C  
IP66



See All Products



Listed weights are fixtures only (excluding mounts)  
Further certification details on the next page  
\*Rated for General Location use only

